


Panther 32 Channel Tribrid 1080P HD-AVS



OVERVIEW

- All 32 Channel Supports HD-AVS & Analog & IP
- H.264 dual-stream video compression
- 1080P recording @ 15fps
- 2 HDMI/VGA/TV simultaneous video output
- 16 ch synchronous realtime playback, smart search
- ONVIF Version 2.4 conformance
- 3D intelligent PTZ positioning
- Support 4 SATA HDDs up to 16TB
- 1 eSATA, 3 USB2.0
- 1.5U Mounting Size

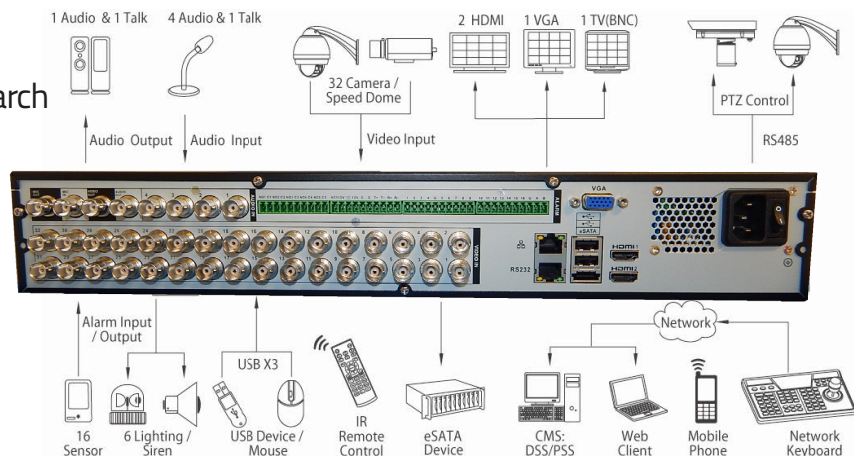

Panther-32-TRI

Main Processor: Embedded processor

Operating System: Embedded LINUX

Video Input: 32 channel, BNC

IP: All channels support 1080P/720P IP Camera

Audio: 4 channel, BNC Input / 1 channel, BNC Output

Two-way Talk: 1 channel Input, 1 channel Output, BNC

Display Interface: 2 HDMI, 1 VGA, 1 TV

Resolution: 1920×1080, 1280×1024, 1280×720, 1024×768

Display Split: 1/4/8/9/16/25/36

Privacy Masking: 4 rectangular zones (each camera)

OSD: Camera title, Time, Video loss, lock, Motion detection, Recording

Recording Compression: H.264/G.711

Main Stream: 720P/960H/D1/HD1/2CIF/CIF(1~30fps)

Extra Stream: CIF/QCIF(1~30fps)

Bit Rate: 48~4096Kb/s

Record Mode: Manual, Schedule(Continuous, MD), Stop

Record Interval: 1~60 min; Pre-record: 1~30 sec,

Post-record: 10~300 sec

Trigger Events: Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips

Video Detection: Motion Detection,

D Zones: 396, Video Loss & Camera Blank

Alarm: 16 channel Input / 6 channel Output

Sync Playback: 1/4/9/16

Search Mode: Time/Date, MD & Exact search (to second)

Backup Mode: USB Device/eSATA Device/Internal SATA Network

Ethernet: RJ-45 port (10/100M/1000M)

Network Functions: HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P

Max. User Access: 128 users

HDD: 4 SATA ports (4 HDDs or 3HDDs+1 CD/DVD-RW), up to 16TB and 1 eSATA External port

USB Interface: 3 ports (2 Rear), USB2.0

RS232: 1 port, For PC communication & Keyboard

RS485: 1 port RS485 for PTZ control, 1 port RS422 for Keyboard

Power Supply: AC 100~240 V, 50/60 Hz / 40W(Without HDD)

Environment: -10°C ~+55°C / 10%~90%RH/86~106kpa

Dimension: 1.5U, 17.32"×16.37"×2.67"

Weight: 13.22 lbs (without HDD)

Access Anywhere



32 Ch Tribrid

www.ClearViewCCTV.com Phone: 855-248-7888

7 YEAR WARRANTY

FREE LIFETIME SUPPORT

Panther-32-TRI

3050 N Andrews Ave Ext. Pompano Beach, FL 33064